

Http: www.yuanchen.com


追求高速高效的缝制极限
操作简便的**高新机器**

Pursuit high-speed fine sewing effect,
simple operation *hi-tech machine*



超宽工作平台

Ultra wide working platform

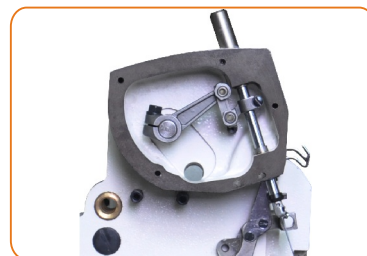

封闭式针杆机构


Close type needle bar mechanism

针杆机构采用的是密封机构以及上下套筒方式，因此提高了针杆部的耐久性。

NEEDLE BAR MECHANISMS SEALED BY CLOSED TYPE STRUCTURE AND COVERED UPPER & LOWER SLEEVE, THUS INCREASING THE NEEDLE BAR OF DURABILITY



TK-800-4

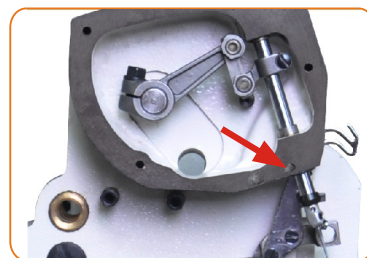

强制吸油装置

Force-sucking-oil mechanism

针杆下套筒部位设置吸油装置，从而改善针杆部位漏油情况，减少油污发散，提高缝制质量。

OIL ABSORPTION EQUIPMENT PARTS SETED UNDER THE NEEDLE BAR SLEEVE, THUS REDUCING OIL LEAKAGE AND RADIATION, IMPROVE THE QUALITY OF SEWING RESULTS.



超高速包缝机系列

HIGH-SPEED OVERLOCK SEWING MACHINE SERIES


High-speed Overlock Sewing Machine Series >>>

TK-800-3/4/5/86 超高速包缝机
SUPER HIGH-SPEED OVERLOCK SEWING MACHINE

用途与特点

TK800超高速包缝机系列产品，采用国际最先进的技术；最新的设计；造型美观大方。它应用于针织服装、内衣、鞋、T恤衫、丝绸、化纤的接头包缝、包边等多种缝纫作业，是一种物美价廉的高档缝纫设备。

TK800 SUPER HIGH-SPEED OVERLOCK SEWING MACHINE ADOPTS THE WORID ADVANCED TECHNOLOGY,THE LATEST DESIGN WHICH AHS AN EXCELLENT LOOK,IT IS SUITABLE FOR OVEREDGING AND OVERLOCKING ON SUITCASES UNDERWEARS,SHOES, T-SHIRTS,SILKS,POLYSTER ETC,IT IS A HIGH CLASS SEWING MACHINE AT COMPETITIVE PRICE.



技术参数

Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon
TK800-3	5.5	1	DCX27 11#	/	1.1-3.8	0-4	0.7-2	7000	3	370/250	470x330x480	26.7/34.4
TK800-4	5.5	2	DCX27 11#	2	1.1-3.8	0-4	0.7-2	6500	4	370/250	470x330x480	26.7/34.4
TK800-5	5.5	2	DCX27 11#	3	1.1-3.8	0-4	0.7-2	6500	5	370/250	470x330x480	26.7/34.4
TK800-86	5.5	2	DCX27 21#	3	6	0-5	0.9-1.1	5500	5	370/250	470x330x480	26.7/34.4

TK-737、747、757
高速包缝机系列

HIGH-SPEED OVERLOCK SEWING MACHINE SERIES

用途与特点

适用于各种薄料、中厚料织物的包边或包缝作业，缝纫张力低，在高速时也能缝出稳定漂亮的线迹，采用自动润滑装置，运转畅顺自如。

SUITABLE FOR OVERLOCKING AND OVEREDGING WORKPIECES OF LIGHT AND MEDIUM MATERIALS. LOW SEWING TENSION, NEAT AND NICE STITCH EVEN RUNNING AT HIGH SPEED. AUTO LUBRICATED AND EXCELLENT PERFORMANCE.



TK-747

技术参数

Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon
TK-737	6	1	DCX1 11#	/	1.5-6	0-5	0.7-2	6000	3	370/250	470x330x480	26.7/34.4
TK-747	6	2	DCX1 11#	2	1.5-6	0-5	0.7-2	6000	4	370/250	470x330x480	26.7/34.4
TK-757	6	2	DCX1 14#	3	1.5-6	0-5	0.7-2	5500	5	370/250	470x330x480	26.7/34.4


TK-007、008 高速绷缝机系列
FLAT BED TAPE BINDING SEWING MACHINE SERIES



TK-007



TK-007-D



TK-008

用途与特点

适用于缝制针织内衣、运动衣裤、T恤衫、胸罩、束腰裙松紧带等各种弹性织物的领口、袖口等。其基本型可形成多线链式线迹，在基本型的基础上进行派生后，还可用作缝制尼龙拉链、缝绣荷叶花边等专用缝纫机。采用全封闭式自动润滑系统，主传动采用同步带传动以确保高转速低噪声性能，对有关零件材质均作轻质化或特殊硬化处理，以提高机器低振、耐磨性能。

HIGH-SPEED STRETCH SEWING MACHINES SERIES IS SUITABLE FOR SEWING KNITTED UNDER WEAR, SPORTS SHIRTS AND TROUSERS, ELASTIC TAPE OF SKIRTS ETC. SUCH AS COLLAR EDGE AND SLEEVE-CUFF ETC. THIS SERIES MACHINE CAN FROM BASIC STITCH AND COVERING STITCH. ON THE ABOVE-MENTIONED BASIC STITCHES, THROUGH DE RIVATION, IT CAN ALSO BE USED AS SPECIAL SEWING MACHINE TO SEW NYLON ZIPPERS AND SCALLOPS. THIS MACHINE ADOPTS COMPLETE-CLOSED AUTO LUBRICATION SYSTEM, MAIN DRIVE ADOPS TIMING BELT TO ASSURE HIGH SPEED AND LESS NOISE, THE CONCERNED PARTS ARE THROUGH SPECIAL TREATMENT, TO IMPROVE ITS WEAR-RESISTANCE CAPACITY.


技术参数

											备注	
TK-007	6.3	2/3	UYX128 GAS 9-11#	5.6	0-4.4	0.5-1.3	4500	4/5	400/370	600x390x630	45/50	
TK-007-D	6.3	2/3	UYX128 GAS 9-11#	5.6	0-4.4	0.5-1.3	4500	4/5	550W	600x390x630	45/50	自动剪线 自动抬压脚
TK-008	5.1	2/3	UYX128 GAS 9-11#	5.6	0-4.4	0.6-1.3	4500	4/5	400/370	600x390x630	45/50	

TK-009 高速绷缝机系列
FLAT BED TAPE BINDING SEWING MACHINE SERIES



TK-009



TK-009-3

用途与特点

本机适合于针织内衣、运动衣裤、T恤衫等衣物的缝制。本机具有强制排油差动调节、HR装置等机构、使缝料保持干净、线迹美观。

THIS MACHINE IS SUITABLE FOR SEWING KNITTED UNDERWEAR, SPORTS APPAREL OR T-SHIRT ETC. THIS MACHINE IS OF MANDATORY OIL DISCHARGING, DIFFERENTIAL ADJUSTMENT AND HR SILICON OIL DEVICES, KEEPING FABRICS CLEAN AND STITCHES BEAUTIFUL.

技术参数

Icon 1	Icon 2	Icon 3	Icon 4	Icon 5	Icon 6	Icon 7	Icon 8	Icon 9	Icon 10	Icon 11	Icon 12
TK-009	6.3	2/3	UYX128 GAS 9-11#	5.6	0-4.4	0.5-1.3	4500	4/5	400/370	600x390x630	45/50
TK-009-3	5.1	2/3	UYX128 GAS 9-11#	5.6	0-4.4	0.5-1.3	4500	4/5	400/370	600x390x630	45/50
TK-009-4	6.3	2/3	UYX128 GAS 9-11#	5.6	0-4.4	0.5-1.3	4500	4/6	400/370	600x390x630	45/50